




微型保险丝(延时型)



Micro Fuse (Time-Lag) 400V/350V/300V/250V/125V

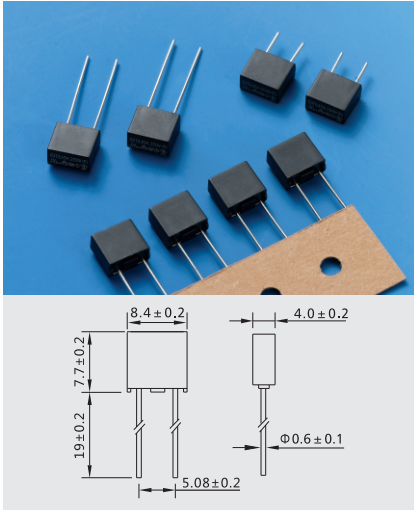

测试标准:
Testing Standard:
 IEC60127-1 IEC60127-3 GB/T9364.1 GB/T9364.3

额定分断能力:
Interrupting Rating:
 35A or 10In Whichever is greater

工作温度:
Operating Temperature:
 -55°C ~ +125°C

材料:
Materials:
 Case:thermoplastic nylon
 Base:thermoplastic nylon
 Lead wire:tinned copper wire

焊接方法:
Soldering Method:
 Wave soldering: 260°C, 10s max
 Manual soldering: 370°C, 5s max

包装:
Packing:
 Automaton taped 1000 PCS per inner box,
 10 inner boxes per external carton.

电气特性: Electrical Characteristics

额定电流的% of Ampere Rating	熔断时间 Opening Time (100mA~6.3A)	熔断时间 Opening Time (8A~10A)
210%	2 min Max(小于2分钟)	5 min Max(小于5分钟)
275%	400 ms~10 s	1 s~20 s
400%	150 ms~3 s	150 ms~3 s
1000%	20 ms~150 ms	20 ms~150 ms

目录编号: Catalog No.T:400V H:350V G:300V A:250V B:125V

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	最大电压降(mv) Max Voltage Drop	熔化热能 ² T Melting Integral (A ² .S)	认证 Approvals												
					UL	DVE	VDE	TUV	CCC	S	JET	其他	● 表示已获认证	○ 表示认证中			
SMT0050T/H/G/A/B	50mA	400V/350V/300V/250V/125V	550	0.02	●												
SMT0063T/H/G/A/B	63mA	400V/350V/300V/250V/125V	480	0.04	●												
SMT0080T/H/G/A/B	80mA	400V/350V/300V/250V/125V	400	0.05	●												
SMT0100T/H/G/A/B	100mA	400V/350V/300V/250V/125V	350	0.06	●												
SMT0125T/H/G/A/B	125mA	400V/350V/300V/250V/125V	300	0.08	●												
SMT0160T/H/G/A/B	160mA	400V/350V/300V/250V/125V	280	0.1	●												
SMT0200T/H/G/A/B	200mA	400V/350V/300V/250V/125V	260	0.2	●												
SMT0250T/H/G/A/B	250mA	400V/350V/300V/250V/125V	240	0.3	●												
SMT0400T/H/G/A/B	400mA	400V/350V/300V/250V/125V	200	0.5	●												
SMT0500T/H/G/A/B	500mA	400V/350V/300V/250V/125V	190	0.9	●	●											
SMT0630T/H/G/A/B	630mA	400V/350V/300V/250V/125V	180	1.2	●	●											
SMT0800T/H/G/A/B	800mA	400V/350V/300V/250V/125V	160	3.9	●	●											
SMT1100T/H/G/A/B	1A	400V/350V/300V/250V/125V	140	5.8	●	●											
SMT1125T/H/G/A/B	1.25A	400V/350V/300V/250V/125V	130	12.8	●	●											
SMT1160T/H/G/A/B	1.6A	400V/350V/300V/250V/125V	120	14.7	●	●											
SMT1200T/H/G/A/B	2A	400V/350V/300V/250V/125V	100	36.0	●	●											
SMT1250T/H/G/A/B	2.5A	400V/350V/300V/250V/125V	100	42.6	●	●											
SMT1315T/H/G/A/B	3.15A	400V/350V/300V/250V/125V	100	89.0	●	●											
SMT1400T/H/G/A/B	4A	400V/350V/300V/250V/125V	100	95.0	●	●											
SMT1500T/H/G/A/B	5A	400V/350V/300V/250V/125V	100	148	●	●											
SMT1630T/H/G/A/B	6.3A	400V/350V/300V/250V/125V	100	252	●	●											
SMT1800T/H/G/A/B	8A	400V/350V/300V/250V/125V	80	441	●	●											
SMT2100T/H/G/A/B	10A	400V/350V/300V/250V/125V	75	480	●	●											
SMT2120T/H/G/A/B	12A	400V/350V/300V/250V/125V	-	510	●	●											
SMT2125T/H/G/A/B	12.5A	400V/350V/300V/250V/125V	-	530	●	●											
SMT2150T/H/G/A/B	15A	400V/350V/300V/250V/125V	-	535	●	●											
SMT2160T/H/G/A/B	16A	400V/350V/300V/250V/125V	-	540	●	●											

Time-Current Characteristics
 电流-时间曲线图

